

# C-PACK

## VAC 967

# C-PACK

## VAC 967



### Technical data:

**Performance:**  
max. 40 packages/min, depending on product and infeed system

**Power supply:**  
400/230 Volt N/PE, 50/60 Hz, approx. 2.0 kW (other connections on request)

### Machine weight:

approx. 900 kg

### Package weights:

0.5 – 5,0 kg (depending on size of product)

### Labelling:

Optional wineglas and clip2clip

### Clipping strip:

thickness: 0.35 – 0.45 mm width : 5 mm

### Required Net Material:

Woven or extruded

### net tube dimensions:

standard 230 mm, others on request

### Infeed height:

1150 mm

### Standard equipment:

- Automatic Tube Change
- adjustable net length
- Touchscreen Display
- automatic Clip head lubrication
- fast unlock system of clip head
- inside illumination
- 48 mm K6 Clip head
- net transport by net transport rollers

### Options:

- label transporting units
- printers
- exit conveyors



**C-PACK**

Verpackungsmaschinen GmbH

Kleiner Moorweg 34  
25436 Tornesch - Germany

Tel: +49-4122-51173  
Fax: +49-4122-55647  
e-mail: c-pack@c-pack.com  
Internet: www.c-pack.com

**C-PACK**

Verpackungsmaschinen GmbH

Kleiner Moorweg 34  
25436 Tornesch - Germany

Tel: +49-4122-51173  
Fax: +49-4122-55647  
e-mail: c-pack@c-pack.com  
Internet: www.c-pack.com

# C-PACK


## VAC 967



automatic lubrication



touchscreen

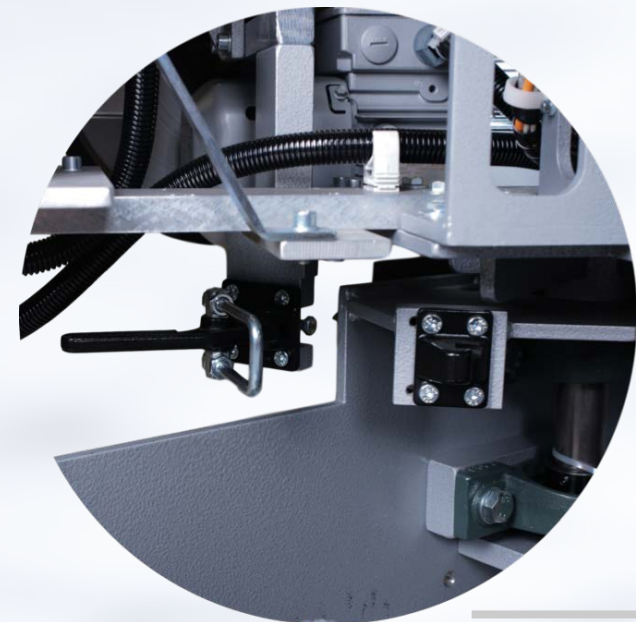

quick opening

